BENCH SCALES			Avery Weigh-Tronix Counting Scales	*
FORKLIFT SCALES				
CHECKWEIGHERS	Exclusive Quartzell® digit defines a highly precise r of counting that's not ava anywhere else.	method		
CONVEYOR SCALES	Accurate. Simple. Adaptable.			
FLOOR SCALES	Amazing.			
COUNTING SCALES	Counting scale with Quartze	ll [®] digital load cells PC -	-820	
TRUCK SCALES		1374 Pieces + TARE 4		
RAILROAD SCALES		Units		
INDICATORS				
SOFTWARE			9	
JUNCTION BOXES	AveryWeith	Colorit and 200	T 8 6 A 5 6 A 2 3 C 0 0 0 C 0 0	
SIGNAL PROCESSING			Juan Puan	
MONORAIL SCALES				
PRINTERS		Aver	y Weigh-Troni	ix
REMOTE DISPLAYS	The counting feature is not legal for trade.			

Avery Weigh-Tronix

The closer you can get to a perfect parts count, the closer you can get to just-in-time inventory. Which will then give you greater manufacturing efficiencies, quicker turnaround, and improved profits. Owning an Avery Weigh-Tronix Quartzell® PC-820 counting scale makes the difference.

Better counting

means a better bottom line

SO SIMPLE, IT INCREASES PRODUCTIVITY FROM THE START.

Ease-of-use is critical to the success of any counting scale, so we've made the PC-820 a model of simplicity. Even with multiple shifts and personnel changes, users will quickly feel confident in all phases of its operation.

Easy-to-read display

Instructions in the prominent display window lead employees through the use of every function, with easyto-follow directions and prompts.

The backlit dot-graphic display features 63 different contrast settings. A quick keystroke makes the adjustment to high or low lighting conditions with no interruption of work.



Prompts give easy-to-follow instructions.

"Soft keys" tailor functions to your needs

Five separate keys —we call them "soft keys" — let you personalize the scale to your individual applications. Easily changed, they direct the scale to perform as many or as few of the functions as you need for a specific task. As a result, operators push fewer keys, and are not faced with a confusing selection of functions that don't apply to their job.




Configure soft keys to only those functions needed for your specific application.

BUILT-IN ADAPTABILITY GIVES YOU MORE FOR YOUR MONEY.

To be truly valuable, a counting scale needs to do more than just count. The PC-820 is flexible enough to adapt to being part of a variety of configurations.

So, rather than buying a new scale when your needs change, simply reprogram the soft keys to add additional capabilities — such as remote base operation, accumulation of counts, data base information and more.




Add soft key functions as your needs change.

Quartzell

WHY QUARTZELL TECHNOLOGY IS BETTER

Quartzell load cells are the only transducers in the industry with the high accuracy and reliability of crystal technology. Quartzell has the double benefit of being more accurate than analog, at an extremely competitive price.

- Unlike traditional load cells, Quartzell load cells are completely digital — no analog components to slow down, corrupt or interfere with weight sensing.
- Usable internal resolution of 1 part in 2 million — provides more precise piece weights.
- Quartz crystals have proven their accuracy from wristwatches to computers.

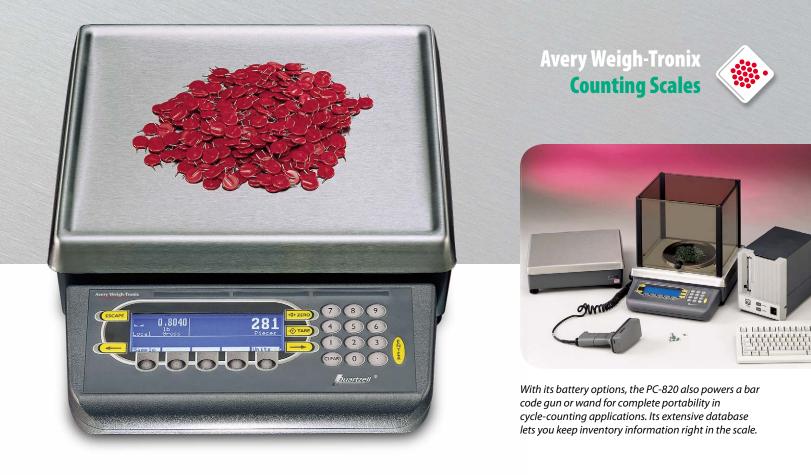

Put cycle-count information at your fingertips

Store as many as 1000 records (up to 2,000 with expanded memory) with an internal database. Each record has enough room to include 16-character part number, 32-character description, tare weight, and various numeric fields. As a result, you can maintain part and count information in the scale. When you need it, it can be quickly and easily recalled, printed, and transmitted for further use.

Avery Weigh-Tronix also offers an optional Piece Weight Lookup Inventory Control Program (PWLU) to connect up to 32 scales to your computer when more memory is needed to store your entire inventory.

Interface with any serial printer

A customized program makes any brand of printer compatible with the PC-820. Your distributor can tailor and deliver the program directly to you. If you change printers, the distributor can adjust the program for you.

Scan bar codes

Get fast piece weights without keying them in or going through the sample process. The PC-820 powers either a bar code gun or wand.

Access a remote base.

For applications that demand it, the PC-820 expands to a dual or triple base system. Just add an optional Quartzell base, and/or an analog deck scale.

Enjoy complete portability.

With both internal and external battery options, the PC-820 is ready to be moved right to the job, instead of forcing you to move the job to the scale. Store cycle-count information with a bar code scanner even when you're in the most remote corners of a warehouse, and download later to a computer.

Configure a system to fit your exact needs, with a variety of Quartzell and analog bases.

For shipping and receiving applications, the PC-820 interfaces with a variety of peripheral equipment.





SPECIFICATIONS

Scale Capacity	Standard Resolution	Expanded Resolution
10 lb	.001 lb	.00005 lb
50 lb	.005 lb	.0002 lb
100 lb	.01 lb	.0005 lb
5 kg	.0005 kg	.00002 kg
25 kg	.002 kg	.0001 kg
50 kg	.005 kg	.0002 kg

Power input (inline transformer):

115 VAC, 50/60 Hz Optional 230 VAC, 50/60 Hz

Operational keys: Zero, Tare, Enter, Escape, Clear,

0-9, Decimal Point, Previous, Next, and 5 Soft Keys All keys provide users with tactile and (configurable) audio acknowledgment when they are activated

Operational annunciators: Display symbols include Stability,

Active Tare, Current Base, Center of Zero, Low Battery, Unit of Measure and Display Label

Display:

240 x 64 dot matrix LCD display 5" x 1.33" displayable area PC-820: Cold cathode fluorescent backlit (white on blue)

Display rate:

Selectable, 0.1 to maximum readable updates

Units of measure: Pounds, kilograms, grams, ounces, pounds and ounces, and two fully custom units of measure

Displayed resolution: Up to 1 part in 500,000

Time and date: Battery protected real time clock

Internal resolution:

Quartzell: 1 part in 2,000,000 Analog (optional): 1,000,000 counts analog

Harmonizer digital filtering:

Fully selectable to ignore noise and vibration

Memory: Capable of storing 1,000 records (2,000 with expanded memory) including part number (16 char), description (32 char), count accumulator, tare, and piece weight.

Specifications subject to change without noitice

Avery Weigh-Tronix

Avery Weigh-Tronix - USA

1000 Armstrong Drive, Fairmont, MN 56031-1439 USA usinfo@awtxglobal.com Toll-Free: (800) 533-0456 Phone: (507) 238-4461

Avery Weigh-Tronix - UK

Foundry Lane, Smethwick, West Midlands B66 2LP UK info@awtxglobal.com Phone: +44 (0) 8453 66 77 88 Fax: +44 (0) 121 224 8183



Please call us or visit *www.averyweigh-tronix.com* for your nearest Avery Weigh-Tronix distributor



© Avery Weigh-Tronix group of companies 2012. All rights reserved. Avery Weigh-Tronix is a registered trademark of the Avery Weigh-Tronix group of companies. This publication is issued to provide outline information only which, unless agreed by an Avery Weigh-Tronix group company in writing, may not be regarded as a representation relating to the products or services concerned.

This publication was correct at the time of going to print however, Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time. Harmonizer²⁴⁴ is a trademark of Avery Weigh-Tronix.

11/12 820_L_09690-0006.indd (C&D) PN 09690-0006D

Power saving: Scale has 2 power-saving timers; one controls backlight and another has capability of shutting the scale off. Any keypress wakes the scale.

Standard input and output:

Com1: RS-232 or RS-485; can be used for printing or bidirectional communications.

Com2: RS-232; bi-directional port or capability of connecting to a serial keyboard (TTL or RS-232), scanner, and printer at the same time

I/O: I2C connection capable of connecting to as many as 32 OPTO 22 I/O modules

Available options:

Remote scale card with connections for an analog base with Analog to digital conversion rate of 60 times per second and an external Quartzell interface

Remote expanded control interface for 8, 16, 24, or 32 OPTO 22 I/O modules (SSCU-8)

External battery: BP-25R 12-Volt battery with built-in charger. Up to 18 hours continuous operation

Internal battery: Two 6-Volt batteries with internal charger. Up to 9 hours continuous operation

230 VAC inline transformer

Ball top (N/A on 10 lb scale)

Alphanumeric, serial keyboard

Draft shield for 10 lb scale (recommended for display resolution above 10,000 divisions)

Operating temperature: 14°F to 104°F (-10°C to 40°C)

Dimensions:

Platform 12" x 14" (50 and 100 lb models) Platform 8.5" dia. (10 lb model) Overall 14" W x 17" D x 4.5" H

Weight: 18.5 lb (Internal options increase weight)

Agencies:

UL/CUL CF

CE NTEP Class III 10,000 divisions, CC#: 00-121 Note: The counting feature is not legal for trade.

