



ScaleLink 2 Wireless Transceiver

Technical Specification

General

ScaleLink 2 is a technician-friendly, wireless solution specifically designed for the weighing industry! Right out of the box, it can transmit and receive serial communications from all types of weighing equipment, including scale indicators, remote displays, computers and printers. New diagnostic features and data checking take all the guesswork out of ensuring signal strength and data integrity.

Use the ScaleLink 2 in place of any regular serial communications cable. Going wireless can eliminate the need for expensive wiring, trenching and conduits, plus it provides greater protection from transient voltages such as those caused by lightning. The frequency-hopping spread spectrum transmission and multiple radio channels greatly reduce interference issues and ensure solid data communications in variable conditions across the landscape and within buildings.

Features and Benefits

- NEW - Wireless traffic light control for XR-4500TL remote displays.
- NEW - Diagnostic features and LED display window to quickly check transmit/receive data, parameter settings, etc.
- No laptops or PDAs needed....technicians can make on-the-spot adjustments to baud rates, radio channels, and more.
- Supports all typical scale indicator transmission types: RS-232, RS-422, 20mA Current Loop (Active and Passive).
- Multi-drop capability for communication with up to 32 units.
- Reduce installation costs with no expensive trenches or conduits.
- Improved lightning protection with no physical connections between system elements.
- Standard NEMA 4 enclosure is ready for tough environments.



SPECIFICATIONS	
Wireless Specs	900 MHz, frequency hopping, 6 selectable radio channels, throughput: 9600 bps, transmit power: 250mW
Device Communications	RS 232. Fully Configurable. RS-422, 20 mA Current Loop (Active & Passive)
Range	Indoor/Indirect: Up to 300 ft. (90m). Outdoor/Line-of-Sight: Up to 1000 ft. (300m) or more.
Power Requirements	12VDC: May be supplied by indicator or other device directly. AC adapter included.
Enclosure	Powder-coated mild steel. Water-resistant (NEMA 4). Watertight cable glands. Viewing window for Status LEDs
Dimensions	6.75" x 7.75" x 1.625" incl. antenna (171mm x 197mm x 41mm)
Weight	1.7 lb (0.75 kg) approx. w/ adapter
Operating Temperature	14°F to 120°F (-10°C to 50°C)
Approvals	USA, Canada, Australia, Europe
Warranty	Two (2) year standard warranty

ScaleLink2 - Wireless Transceiver

Scale to PC or and other devices (ScaleLink to ScaleLink)



Scale to multiple wireless Remote Displays (Point - Multipoint)

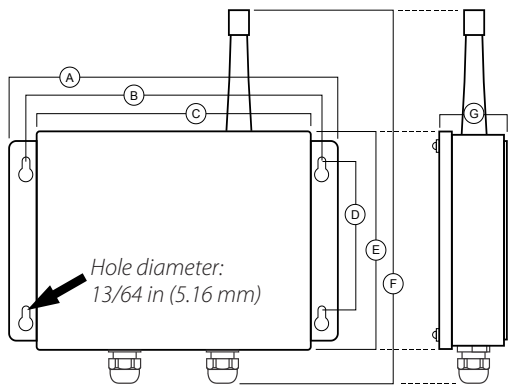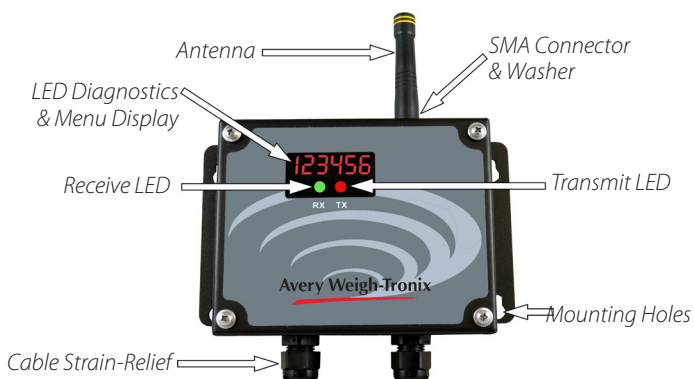

A	B	C	D	E	F	G	Weight
6 3/4 in 171 mm	6 in 152 mm	5 3/8 in 137 mm	3 in 76 mm	4 1/4 in 108 mm	7 3/4 in 197 mm	1 5/8 in 43 mm	1.7 lb 0.75 kg

Avery Weigh-Tronix

www.averyweigh-tronix.com

Avery Weigh-Tronix is an ITW company



© Avery Weigh-Tronix group of companies 2013. All rights reserved. Avery Weigh-Tronix is a registered trademark of the Avery Weigh-Tronix group of companies. This publication is issued to provide outline information only which, unless agreed by an Avery Weigh-Tronix group company in writing, may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print however, Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.